

BG-ECS-60-24

Superlites



Voltage Range: 180-264Vac

Frequency Range: 50Hz

Power Factor: >0.9

AC Current (max): 0.4A

Start Up Time: 0.5s

Inrush Current (ax.): 40A

No Load Power Consumption: ≤ 1 W

Leakage Current: <2.5mA (240Vac)

Voltage: 24V

Rated Power: 60W

Output Current: 2.5A

Load Voltage Range: $\pm 5\%$

Voltage Accuracy: $\pm 5\%$ @ 220-240Vac

Voltage Regulation: $\leq 3\%$ @ Full Load

Efficiency at Full Load: $\geq 85\%$

Short Circuit: Recovers automatically after fault condition is removed

Overload: 105-150%; recovers automatically after fault condition is removed

Over Voltage: >32VDC Recovers automatically after fault condition is removed

Over Temperature: Recovers automatically after fault condition is removed

L: 163mm x W: 43mm x H: 33mm

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk



BG-ECS-60-24

Class II design

Power Factor >0.90


Open circuit, short circuit, over load and over temperature protection

IP67

100% Full Load Burn-In Test

Safety Standards: EN61347-1, EN61347-2-13

Dimensions

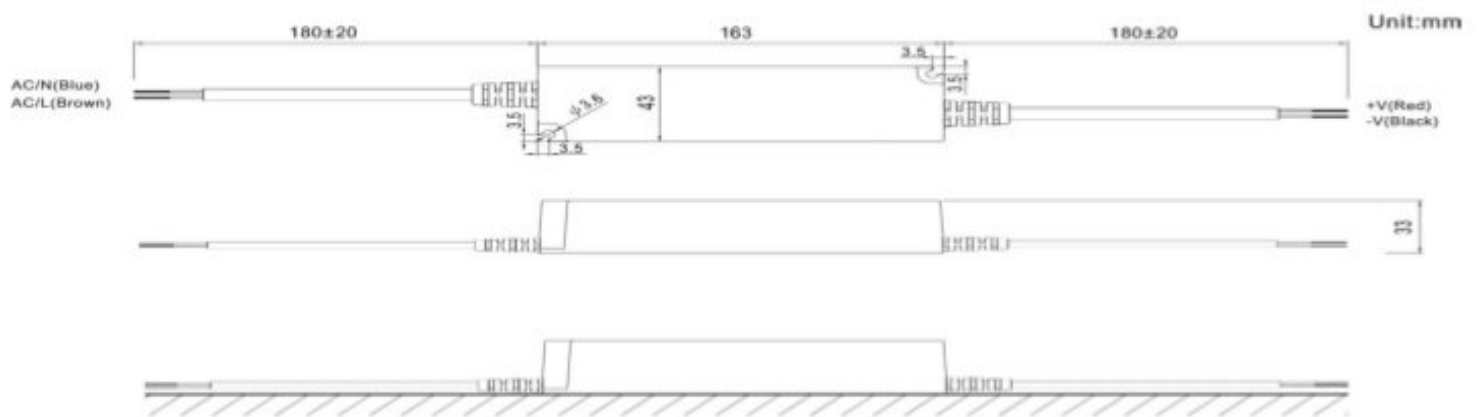

Recommended Mounting Orientation

