

BG-LM-75-24-G1D2



Output Voltage: 24Vdc
Max Output Voltage: 24Vdc + 0.5Vdc
Output Current: Max 3.125A
Output power: Max 75W
Output Power Range: 0-75W
Dimming Range: 0-100%, Max 0.1%
Dimming interface: DALI (IEC62386), Push DIM
Input Voltage: 220-240Vac
Frequency: 50/60Hz
Working Temperature: t_a : -20°C - 50°C t_c : 80°C

Dimension

L: 293mm W: 43mm H: 30mm

Over-heat Protection: Intelligently adjusting or turning off the output current if the PCB temperature $\geq 110^\circ\text{C}$, auto recovers.

Over Voltage Protection: Shut down the output when non-load voltage $\geq 26\text{V}$, auto recovers.

Over Load Protection: Shut down the output when current load $\geq 102\%$, auto recovers

Short Circuit Protection: Shut down automatically if short circuit occurs, auto recovers.

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk



BG-LM-75-24-G1D2



Dimming Interface: DALI, Push DIM

Dimming range from 0-100%, LED start at 0.1% possible

DALI protocol: DALI 1, DALI 2

DALI dimming curve: Linear curve or logarithmic curve

0~100% flicker-free, achieve the level of exemption assessment

Over-heat / Over voltage / Over load / Short circuit protection, recover automatically

Standby Power Loss < 0.5W


Full protective plastic housing

DALI bus standard: IEC62386-101,102, 207



Compliant with Safety Extra Low Voltage standard

Suitable for indoor I/II/III type lamps application

DALI Connection

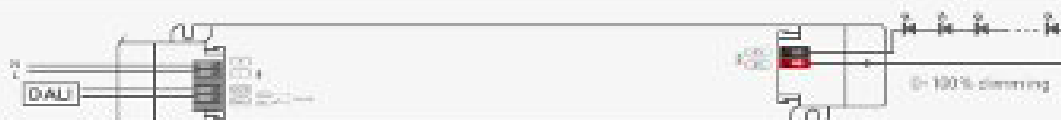

Push DIM Connection

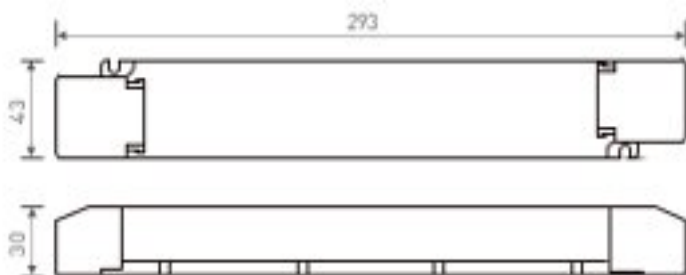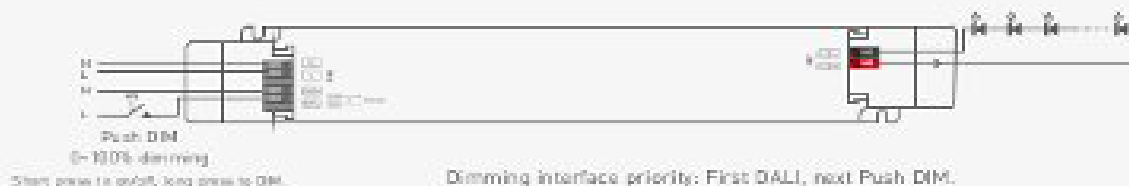

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk

