

DO NOT CONNECT DIRECTLY TO MAINS POWER! Connecting or disconnecting these luminaires while powered will damage the LED.



Adjustable Spotlight

14.2W

10° - 403lms

13.5W

14° - 441lms, 30° - 994lms, 43° - 1028lms, 48° - 981lms, 56° - 991lms

CRI98

2700k

Class III

IP54 Standard

IP65 optional


Integrate Driver Base

360 degree rotation and full 90 degree tilt

Cloud Integrated

Superlites

DO NOT CONNECT DIRECTLY TO MAINS POWER! Connecting or disconnecting these luminaires while powered will damage the LED.

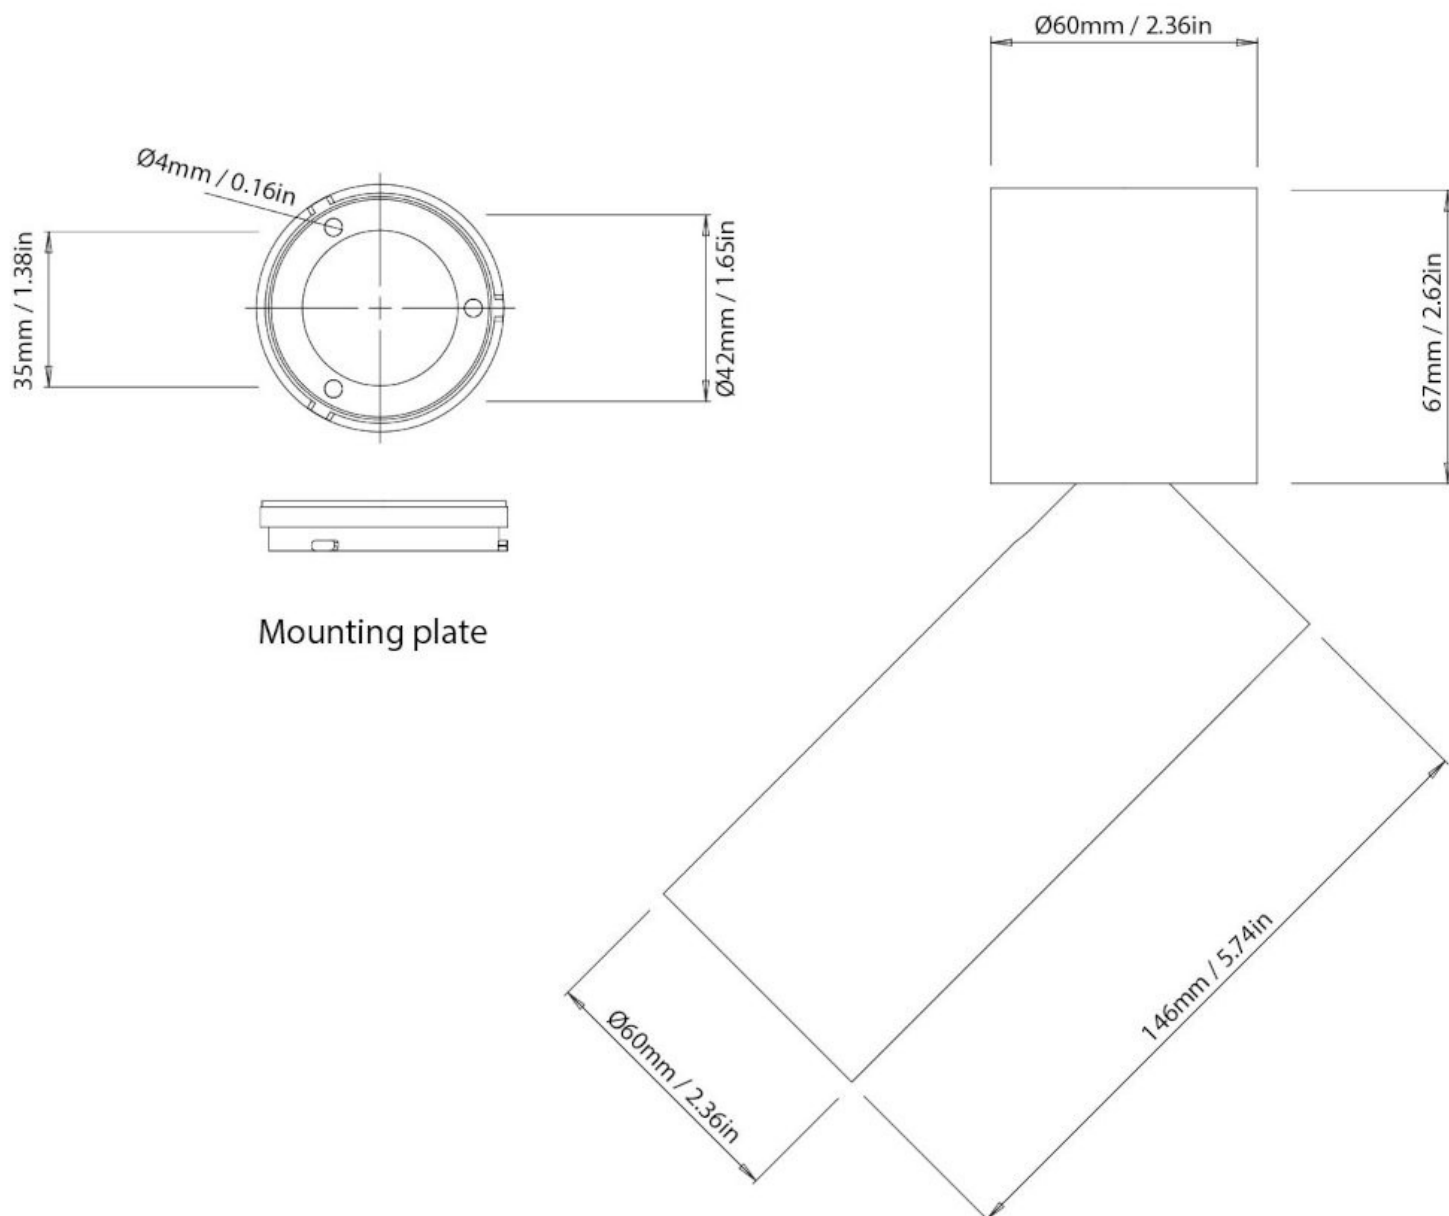

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk

