



Equipment:
- 4 M20 threaded membrane entries

IP66

Material: Polypropylene

Glow wire test: 750°C

Voltage: 400V

Rated cross section: 2.5mm²

2 external mounting feet



Ø cable diameter min: 3mm

Ø cable diameter max: 12mm

External dimensions: Dia: 82mm H: 57mm

COMBI 304

Superlites

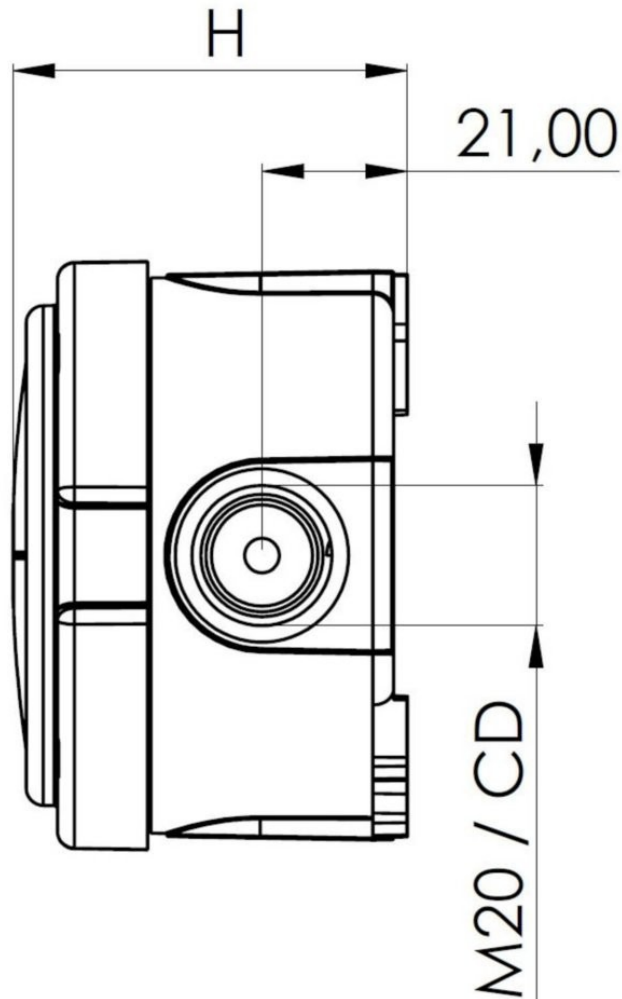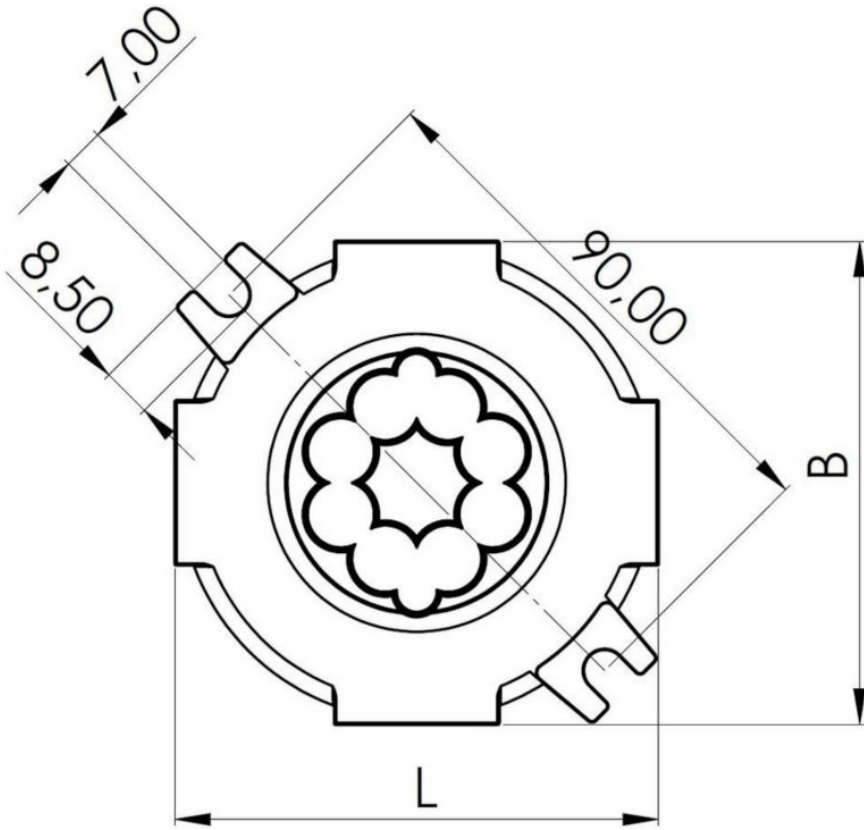

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk

