

CON-CR-17092

Superlites



IP65 fire-rated LED downlight with a front facing quad-colour selection switch (behind front bezel) and a connector-block mounted selectable output level . Includes interchangeable bezel in white. Includes a constant current driver with loop-in/loop-out tool-less wiring connector.

Easy access quad-colour selection switch that can change the light colour between 2700K, 3000K, 4000K or 6000K colour temperature.

30, 60 & 90 minute fire rated

4W/6W/8W

2700K/3000K/4000K/6000K

4cct colour temperature

60° beam angle

CRI:80

IP65

Dimmable

Class II

220-240V

Cutout: Ø 68-72mm

Diameter: 87mm

Height: 45mm

Firesafe Fixed Bezel - White, Black, Chrome, Satin, Brass

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk




CON-CR-17092

Superlites



68-72mm

Ø - Cutout

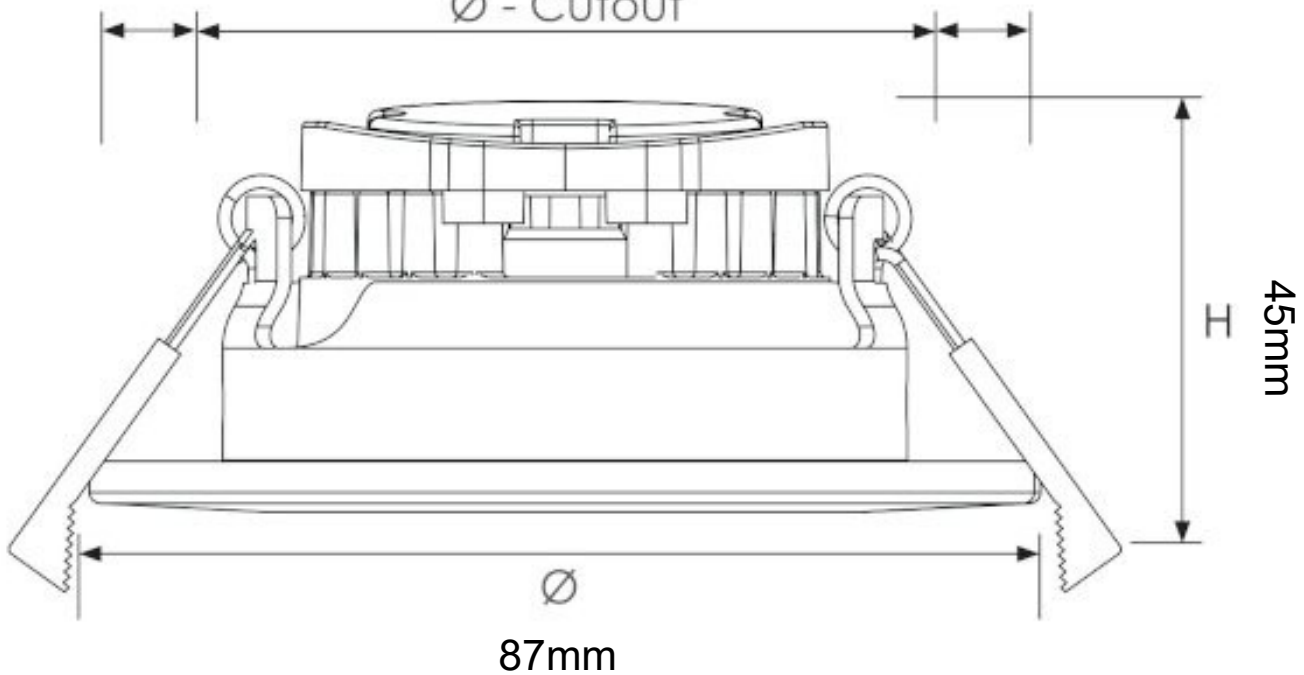

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk

