



Output Voltage: 9-42Vdc
Max Output Voltage: $\leq 48\text{Vdc}$
Output Current Range 100-700mA
Output Power Range: 0.9W-20W
Dimming Range: 0~100%, down to 0.01%
Dimming interface: 0-10V (1-10V, 10V PWM, RX)
Input Voltage: 115Vac/230Vac
Frequency: 50/60Hz
Working Temperature ta: -20 ~ 50°C tc: 80°C

Dimension

L: 142mm W: 40mm H: 23mm

OverLoad Protection:

Automatically protect the device when the load exceeds 102% of the rated power.

Automatically recover once load is reduced

Over-heat Protection:

Intelligently adjust or turn off the current output if the PCB temperature $\geq 110^\circ\text{C}$.


When the PCB temperature $< 90^\circ\text{C}$, automatically recover normal output

Short Circuit:

Enter hiccup mode if short circuit occurs, and recover automatically

Product Size

Unit: mm

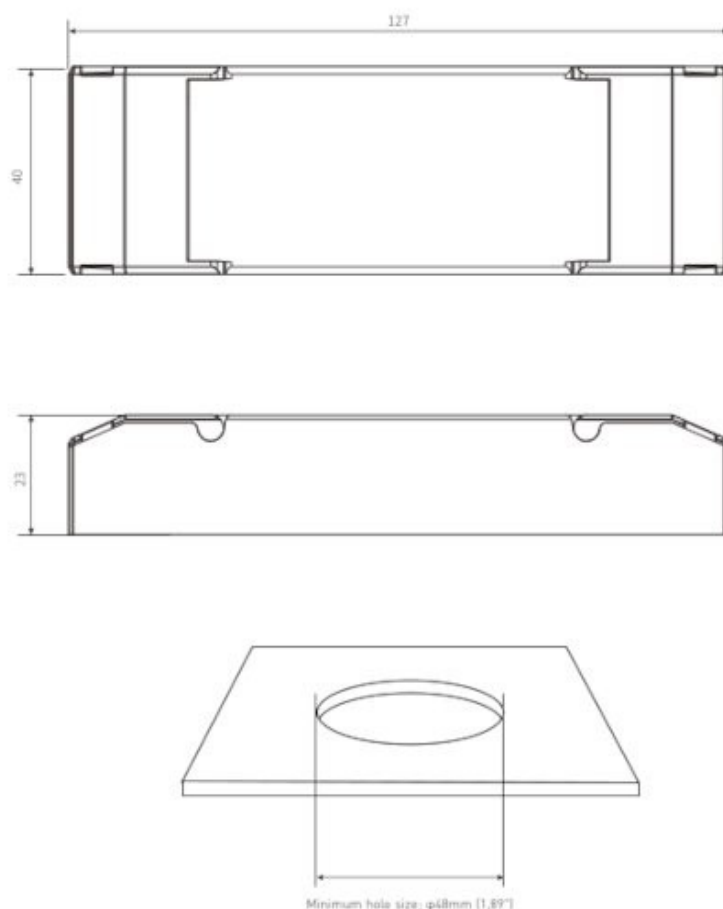

Wiring Diagram

0-10V Connection

