

These products require an LED driver - DO NOT CONNECT DIRECTLY TO MAINS POWER! Connecting or disconnecting these luminaires while powered will damage the LED.



True is the perfect choice for flawlessly finished ceilings and barely visible fittings. Plastered in place, the bezel can be removed and hand-painted the exact same colour as the ceiling – no need to wait for custom RAL finishing. As the low-glare downlight tilts within the luminaire, it produces no protrusion below the ceiling.

True Adjustable Plaster in Downlight

11.4W

Class III

IP54 Standard

IP65 Optional

26° - 588lms - 11.4W

41° - 596lms - 11.4W

48° - 576lms - 11.4W

55° - 600lms - 11.4W

Tilt: 28°

2700k

CRI98


Cutout: 89mm

H: 70mm W: 80mm

Must have 10mm void space above fitting.

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk



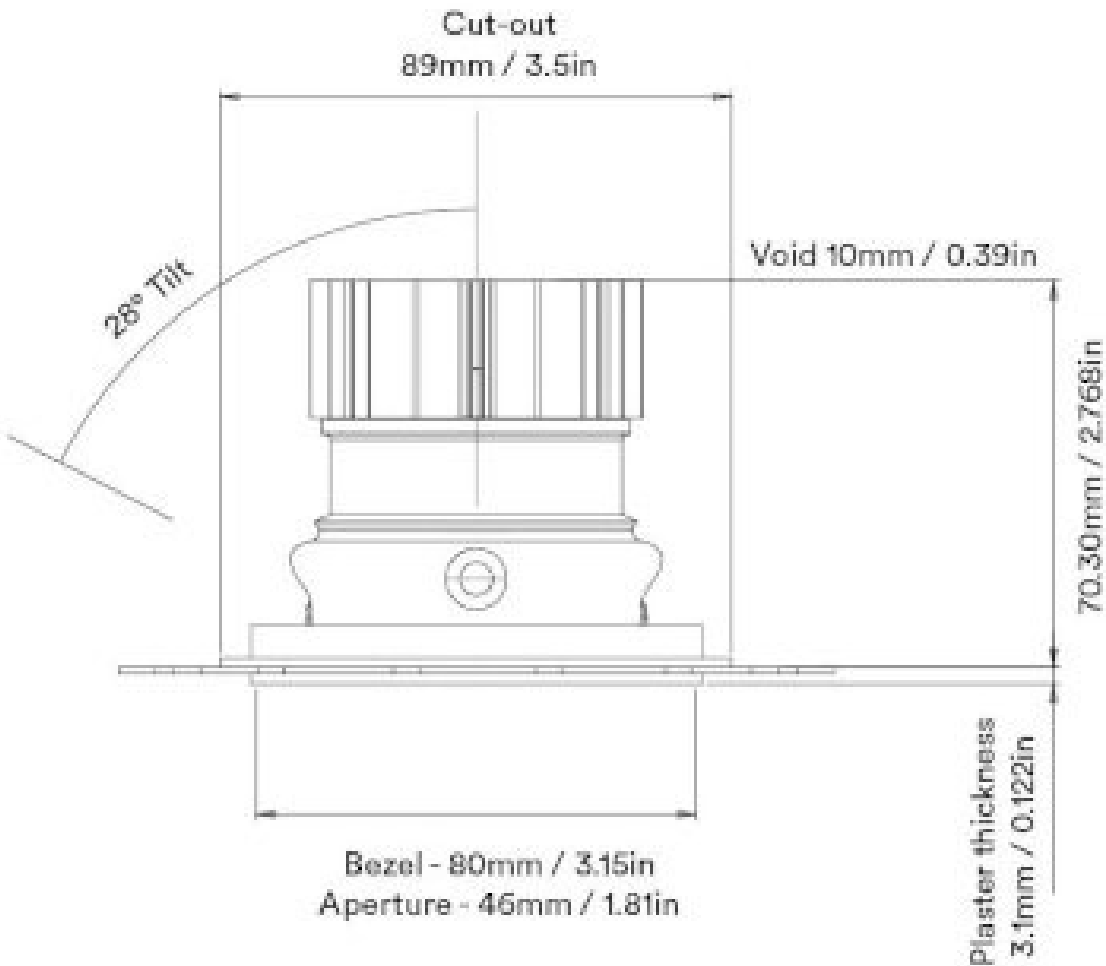

Unit height increases by 21.65mm / 0.85in for spot and elliptical beams

