



Fixed Downlight

11.4W/12.2W

Class 3

IP44 Standard

IP65 optional

10° - 267lms - 12.2W

27° - 704lms - 11.4W

43° - 722lms - 11.4W

51° - 696lms - 11.4W

2700k

CRI98

924lms

Cutout: 72mm


Lens: 51mm

H: 75mm W: 80mm

Must have 10mm void space above fitting.

0207 924 2055
sales@superlites.co.uk
www.superlites.co.uk



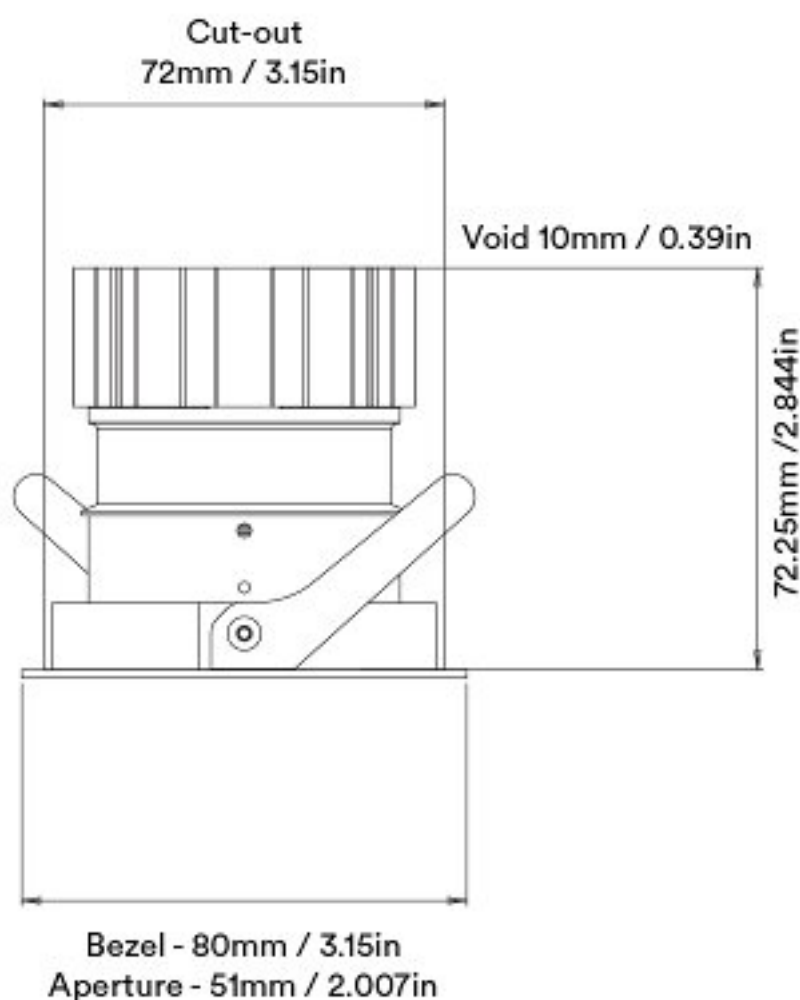

Unit height increases by
21.65mm / 0.85in
for spot and elliptical beams